(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 24 June 2004 (24.06.2004)

PC₁

(10) International Publication Number WO 2004/053288 A1

(51) International Patent Classification⁷: 23/01, 23/02, 23/08

E21B 21/10,

(21) International Application Number:

PCT/CA2003/001889

- (22) International Filing Date: 8 December 2003 (08.12.2003)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


60/431,227 2,444,648 6 December 2002 (06.12.2002) US 9 October 2003 (09.10.2003) CA

(71) Applicant (for all designated States except US): TESCO CORPORATION [CA/CA]; 6204 - 6A Street SE, Calgary, Alberta T2H 2B7 (CA).

- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ANGMAN, Per, G. [CA/CA]; 6204 6A Street SE, Calgary, Alberta T2H 2B7 (CA). SLACK, Maurice, W. [CA/CA]; 1831 104A Street NW, Edmonton, Alberta T6J 5C1 (CA).
- (74) Agent: BENNETT JONES LLP; Attention: Roseann Caldwell, 4500 Bankers Hall East, 855 - 2nd Street SW, Calgary, Alberta T2P 4K7 (CA).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: ANCHORING DEVICE FOR A WELLBORE TOOL

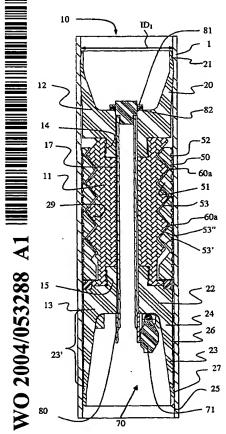

(57) Abstract: An anchoring device for tool is disclosed that can be positioned downhole and used in casing. The anchoring device can have an architecture that supports installation by running downhole and into engagement with a recess formed in the casing. The anchoring device can support the use of weak materials such as plastic.

